

广州安的电子技术有限公司
SafTTY Electronic Technology Co., Limited

ST11 系列热保护器技术规格书
Technical Specifications for ST11 Series Thermal Protector



编制 Draw up: 叶东

审核 Examine: 吴如洋

批准 Approved: _____

发布日期 Issue Date: 2025.07.11

ST11 系列热保护器技术规格书

Technical Specifications for ST01 Series Thermal Protector


1 产品用途 Product application

ST11 系列热保护器具有体积小、电流热效应小、控温准确、感温灵敏、抗压强度高等特点，广泛适用于电动机、水泵，变压器、线圈、电子产品、传感器的过热保护。可用于危险场所电机和发电机的保护器。

ST11 series thermal protector has the following features: miniature size, The thermal effect of current is slight, accurate temperature response, temperature sensitive, compact and pressure stable, etc. It is widely used in electric motors, pumps, transformers, coils, electronics and sensors for thermal overheat protection. Thermal Protectors For Enclosures of Hazardous Location Motors and Generators.

2 外形和结构: Shape and structure

动作温度范围 Operating Temp. Range from 60°C-200°C

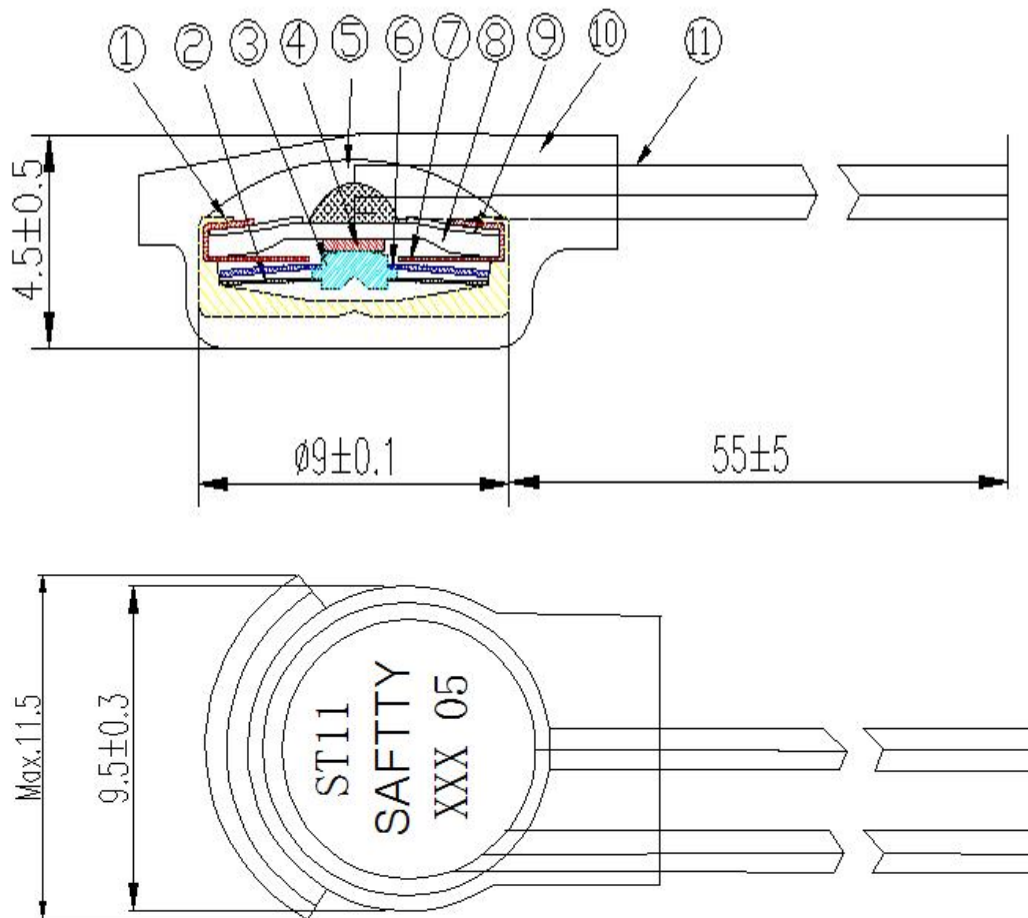

序号 No.	零件名称 Part name	序号 No.	零件名称 Part name	序号 No.	零件名称 Part name
1	外壳 Case	5	环氧树脂 Epoxy resin	9	绝缘纸 Insulation paper
2	弹片 Spring	6	双金属片 Bimetal-disc	10	绝缘套管 Shrink cap insulation
3	动触点 Movable contact	7	日东纸 Insulation paper	11	引线 Lead wire
4	静触点 Stationary contact	8	盖板 Cover plate		

注：该厚度值 4.5 为使用 UL10362 AWG22 直径为 1.35mm 的导线的产品；如需要特定线材，产品的厚度测量值会改变。

Note: This thickness value 4.5 is a product using UL10362 AWG22 wire with a diameter of 1.35 mm; if a specific wire is required, the thickness measurement value of the product will change.

3 性能 （性能数据均为内部实验室测试，供客户参考。客户应根据自己的标准确认是否适用。我们保留在进一步发展过程中做出改变的权利。）

Capabilities (The performance data are all internal laboratory tests for customer reference. Customers should confirm whether it is applicable based on their own standards. We reserve the right to make changes during further development.)

3.1 电气参数

额定交流电压 Rated AC voltage: 250V;

额定直流电压 Rated DC voltage: 24V;

最大承受电压 Maximum withstand voltage: AC500V; DC28V;

额定电流/寿命 Rated current/lifetime (COSΦ=1.0)

60℃-200℃ 产品电流/寿命 model current / cycle life:

AC:2.5A-10000cycles;6.3A-3000cycles;7.5A-300cycles;

3.2 动作特性： Performance

3.2.1 额定断开温度 60℃~200℃（详见附表）。

Rated open temperature: 60℃~200℃(details as per attached list)

3.2.2 复位温度（详见附表）。

Reset temperature: (details as per attached list)

3.3 电气强度 Electric strength:

测试仪器为耐压测试仪 the test instrument is high voltage tester.

a.产品在断开时的引线之间应能承受 AC500V, 历时 1min 而无击穿闪络现象;

When the product is in the breaking state, the lead wires should be able to withstand AC500V lasting for 1min without breakdown or flashover;

b.产品引线与绝缘外壳之间能承受 AC2000V, 历时 1min 而无击穿闪络现象。

The part between the lead wires and the case should be able to withstand AC2000V lasting for 1min without breakdown or flashover;

3.4 绝缘电阻 Insulation resistance:

在正常条件下, 引线与绝缘外壳之间的绝缘电阻在 $100M\Omega$ 以上。(所用表计 DC500V 兆欧表)

Under normal conditions, the insulation resistance between leads (terminal) and case should be more than $100M\Omega$ measured by ohmmeter of DC500V.

3.5 接触电阻 Contact resistance

标准引线长度 55mm 产品的接触电阻应不大于 $50m\Omega$ 。

The contact resistance of standard lead wire length 55mm products should be lower than $50m\Omega$.

3.6 抗拉力试验 Tensile resistance test

产品的引线端应能承受大于或等于 30N 静拉力并保持 1 分钟, 导线不断裂或松动。

Terminal & leads should endure more than 30N axes direction pull lasting for 1 minute without break or loosness.

3.7 耐高温试验 High temperature test

产品置于高于额定动作温度 30°C 的空气环境中保持 96h, 取出放置 2 小时后, 检测其温度变化不超过初始值的 $\pm 5^{\circ}\text{C}$ 或 $\pm 5\%$, 取最大值。

Keep the thermal protector in an incubator which temp. is 30°C higher than its rated switching temperature for ninety six hours, and test it two hours later after taking out from the incubator, while the temperature change does not exceed the initial value of $\pm 5^{\circ}\text{C}$ or $\pm 5\%$, returns the maximum value.

3.8 耐低温试验 Low temperature resistance test

产品置于 -40°C 空气环境中保持 96h, 取出放置 2 小时后, 检测其温度变化不超过初始值的 $\pm 5^{\circ}\text{C}$ 或 $\pm 5\%$, 取最大值。

Keep the thermal protector in a -40°C incubator for ninety six hours, and test it two hours later after taking out from the incubator, while the temperature change does not exceed the initial value

of $\pm 5^{\circ}\text{C}$ or $\pm 5\%$, returns the maximum value.

3.9 抗振试验Anti-Vibration test:

热保护器应能承受振幅 1.5mm，频率变化 10~55Hz，扫描变化周期 3~5 次/min，振动方向 X、Y、Z，每个方向各连续振动 2h，检测其温度变化不超过初始值的 $\pm 5^{\circ}\text{C}$ 或 $\pm 5\%$ ，取最大值。

Thermal protector should be able to withstand the amplitude 1.5mm, frequency 10- 55Hz, scanning change cycles of 3-5 times /min. The vibration direction X, Y, Z and each direction vibrates on a continuous basis for 2 hours while the temperature change does not exceed the initial value of $\pm 5^{\circ}\text{C}$ or $\pm 5\%$, returns the maximum value.

3.10 极限短路试验Short-circuit limit test

产品在串接 RL1-15A 熔断器的电路中承受 200A 的极限短路电流时，应不引起包裹在保护器上的棉花燃烧。

When the thermal protector is in series connection with RL1-15A fuse to withstand short circuit current limit of 200A, it should not cause the cotton burned which is wrapped on the thermal protector.

4 产品断开弹跳时间 Product disconnection bounce time

Bounce Time<1ms.

5 其他事项: Others


5.1 断开温度检测的升温速率应控制为 $1^{\circ}\text{C}/1\text{min}$ ，用指示灯显示通断状态，允许通过产品的电流不超过 0.01A。

For action temperature testing, temperature rising rate should be controlled at $1^{\circ}\text{C}/\text{min}$ and use indicator light to show the on/off state. The testing current should be no more than 0.01A.

5.2 使用过程中产品不能承受强烈冲击力及压迫力；最大承受压力为 450N.

In your production, the thermal protectors could not withstand a big impact and stress. The maximum bearing pressure is 450N.

5.3 型号规格说明: Model Code System explanation

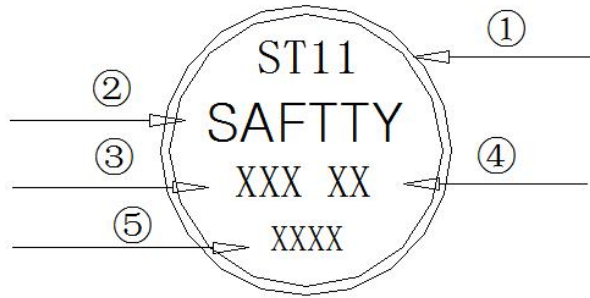

产品内部外壳打标 The mark of internal metal case

- ① ST11--产品型号 Model No.
- ② SAFTTY--安的公司标志 SAFTTY logo
- ③ XXX--产品动作温度 (060-200) , 表示该产品在标识温度情况下动作 (单位: °C)
Product operating temperature (060-200), indicating that the product is operating at the identified temperature (unit: °C)
- ④ XX--产品动作温度精度, 05 --->±5°C 10 --->±10°C.
Product operating temperature tolerance, 05 --->±5°C; 10 --->±10°C.
- ⑤ XXXX--生产批次号, 用来产品追溯。批次生成规则如下:
Production batch number for product traceability. The batch generation rules are as follows:

生产批次号 Production batch number							
K	v	A	1				
每周批次顺序号 (以大写英文字母加1-9数字组成, 数字与字母循环组合) Weekly batch sequence number (composed of uppercase English letters plus 1-9 numbers, numbers combined with letter loops)							
周 (用大写或小写或数字组成, 详见以下周序号列表) Weeks (consisting of uppercase or lowercase or numbers, see the list of weekly serial numbers below)							
年份 (用大写英文字母表示, 详见以下表) Year (expressed in capital letters, see table below)							
如: 2024年48周第1批次产品应表示为: KvA1 For example, the first batch of products in the 48th week of 2018 should be expressed as: EvA1							
1. 年序号表如下 The chronological table is as follows:							
年份 YEAR	2024	2025	2026	2027	2028	2029	2030
标记 MARK	K	L	M	N	O	P	Q
2. 周序号表如下 The weekly sequence number table is as follows:							
周 WEEK	1(27)	2(28)	3(29)	4(30)	5(31)	6(32)	7(33)
标记 MARK	A(a)	B(b)	C(c)	D(d)	E(e)	F(f)	G(g)
周 WEEK	8(34)	9(35)	10(36)	11(37)	12(38)	13(39)	14(40)
标记 MARK	H(h)	I(i)	J(j)	K(k)	L(l)	M(m)	N(n)
周 WEEK	15(41)	16(42)	17(43)	18(44)	19(45)	20(46)	21(47)
标记 MARK	O(o)	P(p)	Q(q)	R(r)	S(s)	T(t)	U(u)
周 WEEK	22(48)	23(49)	24(50)	25(51)	26(52)	53	
标记 MARK	V(v)	W(w)	X(x)	Y(y)	Z(z)	9	

注: 标准品引线为 UL3398/ UL10362, AWG22, 白色/黄色, 引线长 55/55mm, 半剥 6mm。

Standard lead wire is UL3398 or UL10362, AWG22, White or Yellow, 55mm and semi-stripped 6mm.

5.4 包装、储存、运输 Packing, storage and transportation

① 产品包装采用透明塑料自封袋，每个小包装袋含 100pcs，每个大包装包含 10 小包，发货均采用纸箱包装，尺寸为 32*26*25CM；如果总数量偏少，我司会采用其他规格纸箱。

Product packaging using transparent plastic self-sealing bags, each small packaging bag contains 100pcs, each large package contains 10 small packets, the delivery is packed in cartons, the size is 32 * 26 * 25CM; if the total quantity is small, our company will use other specifications of cartons.

② 储存时放于湿度 40%~80%、温度-5~40°C环境中 12 个月无变化；

The product should be stored at the -5~40°C environment with the relative humidity of 40%~80% for 12 months without changes.

③ 直接运输或托运，应轻拿轻放，避免碰撞或受潮。

Direct transportation or shipment, it should be handled carefully and avoid collision or damp.

附表: Attached list

序号 No.	动作温度°C Open temp.	复位温度°C Reset temp.	序号 No.	动作温度°C Open temp.	复位温度°C Reset temp.
1	60±5	≥35	16	135±5	100±15
2	65±5	≥35	17	140±5	105±15
3	70±5	≥35	18	145±5	110±15
4	75±5	≥35	19	150±5	115±15
5	80±5	≥35	20	155±5	120±15
6	85±5	50±15	21	160±5	125±15
7	90±5	55±15	22	165±5	130±15
8	95±5	60±15	23	170±5	135±15
9	100±5	65±15	24	175±5	140±15
10	105±5	70±15	25	180±5	145±15
11	110±5	75±15	26	185±5	120±15
12	115±5	80±15	27	190±5	125±15
13	120±5	85±15	28	195±5	130±15
14	125±5	90±15	29	200±5	135±15
15	130±5	95±15			